


Driver Installation - Fuji Xerox AP-V C5575 T2 MFP (lobby area 10/F ELB)

I. Windows (7, 8.x, 10)

1. Download the appropriate driver (32bit or 64bit) from:


<http://www.econ.cuhk.edu.hk/econ/en-gb/facilities/computer-facilities>

2. Double-click the zip file to expand it. Then double-click 'setup.exe' to begin driver installation.

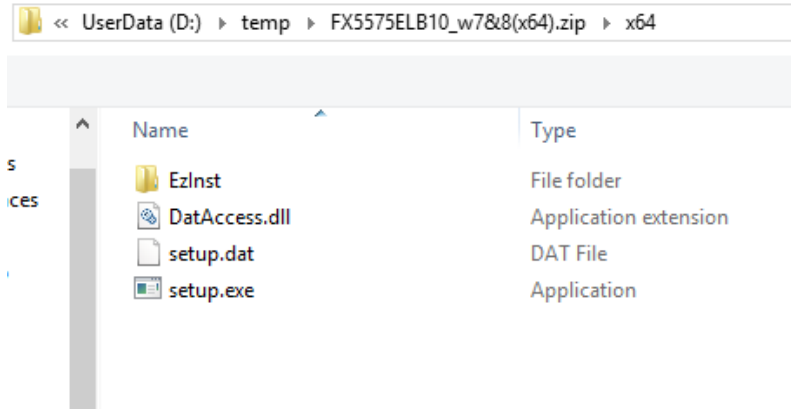


(answer 'Yes' when asked about making changes to the computer)

3. A window titled 'Customized Print Driver' appears, click 'Start Install' button at the bottom.

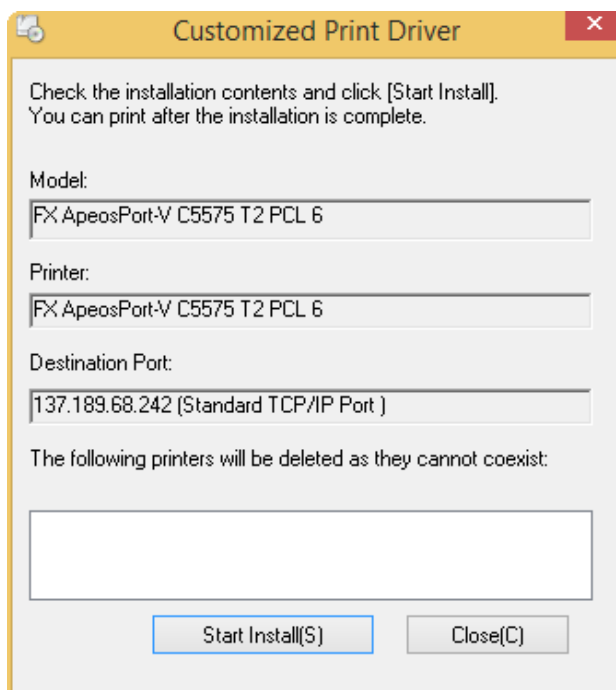

4. Wait a moment then a window will pop up telling you that the driver installation is successful. Click 'OK' to close the windows.

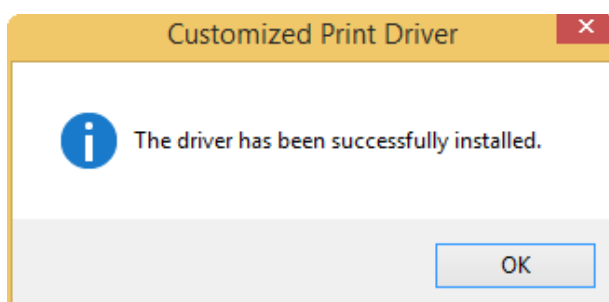

5. To confirm the printer driver has been installed,

Win7: Click Start > 'Device and Printers'

Win8.x: Open the Charms bar, click Settings > PC info > Control Panel > View Device and Printers (under 'Hardware and Sound' catalog).

Win10: Right-click 'Start' > 'Control Panel' > 'Device and Printers'

The name of the printer is 'FX ApeosPort-V C5575 T2 PCL6 @ELB10F'.

**** The customized printer driver for Windows is set to print in B/W and duplex by default. You may change the default parameters yourself if needed.**

II. Mac OS-X (v10.5-10.13)

1. Download the specific driver (for model AP-V C5575) from the following webpage:

http://onlinesupport.fujixerox.com/setupDriverForm.do?ctry_code=HK&lang_code=en&d_lang=en&pid=AP5C5575

(select Mac OS X 10.x according to OS version of your Macbook in the dropdown box for Operating System.)

Home > Support & Drivers > Drivers & Downloads

ApeosPort-V C5575 Drivers & Downloads

Not your product? Search again

Operating System: Mac OS X 10.13 | Language: English | Help with Driver Selection > +

Recommended

Mac Print Driver >

Version: 1.72.173 | Compatibility > | File Information >

Notes

Mac PPD File and Plug-in Installer

2. ITSC has published the following driver installation guide for a similar model

(<http://www.cuhk.edu.hk/itsc/network/ssp/pichiu/install/WMYLCmac.pdf>) but you need to make the following changes in our case (step x is the corresponding sequence in ITSC's PDF):

Step 1: the driver download webpage and driver name is different from ITSC (see step 1 above).

Step 2: filename of downloaded driver should be 'fxmacprnps1803am108iml.dmg' (as at 4/2018)

Step 11: (a) set the IP address to '137.189.68.242'.

(b) set Protocol to 'Line Printer Daemon – LPD'

(c) Name of the MFP machine can be any meaningful string (e.g. FX AP-V C5575 @ELB10F).

Step 12: Key in 'FX' and scroll to find the appropriate driver. It should be something like 'FX ApeosPort-V C5575 T2 v3018.103 PS'

Step 14: this step may not appear and could be skipped

(4-2-2016, by kwyau, updated on 19/5/2016, 30/4/2018)